



AIR CONDITIONING



REFRIGERATION



HEATING



compact

CONDENSATE REMOVAL PUMP



The compact boiler pump uses piston technology and has an impressive head and flow. Ideal for domestic gas boilers and furnaces.



35L/h max. flow





15m max. rec. head (flow rate 10L/h)

KEY FEATURES


- Compact & discreet
- High head
- Bracket for easy install
- Easy servicing

SUITABILITY

- Up to 85kW / 290,000Btu/h with condensate PH value >2.7
- Domestic gas fired condensing boilers; High efficiency gas furnace

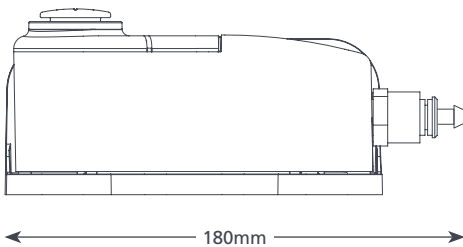


0.57 kg

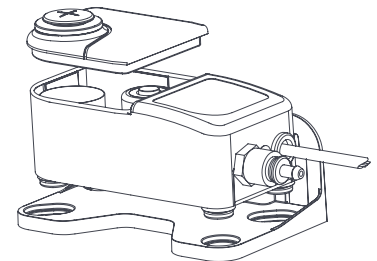

COMPACT BOILER SPECIFICATIONS

Max. flow	35L/h @ 0 head
Max. rec. head	15m
Tank capacity	0.24L
Sound level@1m	35dB(A)
Power supply	230V AC 50-60Hz 0.1A*
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	85kW / 290,000Btu/h
Max. water temp	60°C / 140°F
Inlet/outlet	27mm in, 6 & 10mm out
IP Protection	IP67
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	n/a

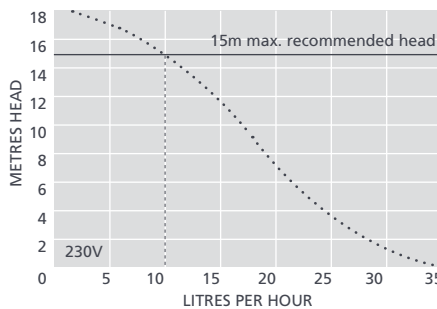

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Tube To Soil Stack Adaptor	FP2038
1 Amp Fuse	FP2620
Vinyl Tube Braided 3/8" (10mm)	AX5101

Xtra For more installation accessories take a look at our Aspen Xtra range

COMPACT BOILER OPTIONS

Compact boiler pump FP2944

*Other voltages available

IN THE BOX

Compact boiler pump (including hard wired 1.5m power cable) • Mounting Bracket • 6m discharge tube (6mm ID) • Pipe adaptor • Fixing kit • Install manual

Download manual at aspenspumps.com



aspenspumps.com

+44 (0)1323 848842

sales@aspenspumps.com

Making life easier for the installer