



AIR CONDITIONING



REFRIGERATION



HEATING



# errp

## CONDENSATE REMOVAL PUMP

Made of robust plastic, the lightweight ERRP (Economical Retail Refrigeration Pump) effectively pumps away defrost water and filters debris.



225L/h max. flow




35m max. rec. head  
(flow rate 10L/h)

### KEY FEATURES

- Top & side inlet options
- Easy to clean & carry
- Filter to catch debris
- Plug & play


### SUITABILITY

- Refrigeration units; cold store cabinets
- ✓ **Perfect for...** Multiple refrigeration units

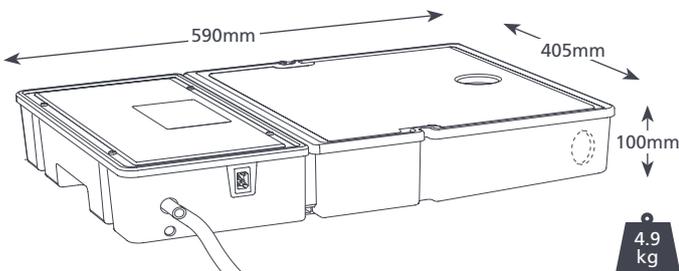

### ERRP SPECIFICATIONS

Max. flow	225L/h @ 0 head
Max. rec. head	35m
Tank capacity	11L
Sound level@1m	60dB(A)
Power supply	230V AC 50-60Hz 0.2A
Rated	Continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	50mm in, 10mm out
IP Protection	IPX4
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

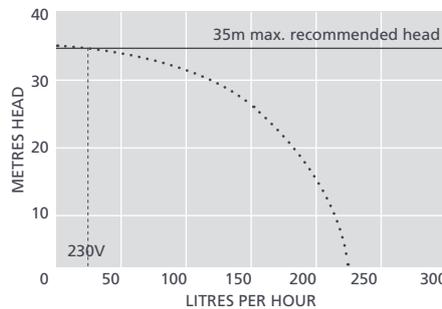

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5101
StayClean Strips	FP1248

**Xtra** For more installation accessories take a look at our Aspen Xtra range

### ERRP OPTIONS

ERRP – top inlet	FP2318
ERRP – side inlet	FP2320

\* Side inlet only

### IN THE BOX

- ERRP pump
- 2m Plug & play power cable
- 1 1/2" BSP connector (for 40mm ID waste pipe)\*
- Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)



[aspenspumps.com](http://aspenspumps.com)

+44 (0)1323 848842

[sales@aspenspumps.com](mailto:sales@aspenspumps.com)

Making life easier for the installer