



AIR CONDITIONING



REFRIGERATION



HEATING



EN

mechanical

CONDENSATE REMOVAL PUMP



Bringing mini pump and peristaltic pump technology together. Simply position the remote reservoir (float switch) in the condensate tray or fix to the drain-pipe connection (depending on chosen reservoir). Alarm option available.



6.5L/h max. flow






12m max. head (flow rate 6.5L/h)

KEY FEATURES

- Float switch operated
- Remote install possible
- Submersible secondary reservoir included

SUITABILITY


- Up to 8.5kW / 29,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units



1.7 kg

MECHANICAL SPECIFICATIONS

| | |
|--------------------|----------------------|
| Max. flow | 6.5L/h @ 12m head |
| Max. head | 12m |
| Max. suction lift | 3m |
| Sound level@1m | 47dB(A) |
| Power supply | 230V AC 50-60Hz 0.2A |
| Rated | Continuously |
| Class | I appliance |
| Max. unit output | 8.5kW / 29,000Btu/h |
| Max. water temp | 40°C / 104°F |
| Inlet/outlet | 6mm ID |
| IP Protection | IPX1 |
| Safety switch | FP2078 n/a, FP2079 ✓ |
| Thermal protection | ✓ |
| Fully potted | n/a |
| Self priming | ✓ |

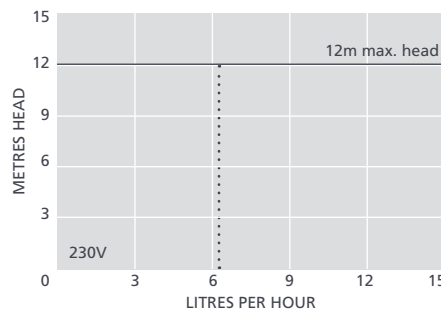

SUGGESTED XTRA ACCESSORIES

| Description | Part No. |
|----------------------------|----------|
| Peri Spare Tube Kit | FP1282 |
| 1 Amp Fuse | FP2620 |
| Tube To Soil Stack Adaptor | FP2038 |

Xtra For more installation accessories take a look at our Aspen Xtra range

MECHANICAL OPTIONS

| | |
|-----------------------|--------|
| Mechanical | FP2078 |
| Mechanical with alarm | FP2079 |

IN THE BOX

Mechanical pump • 2m Plug & play power cable • Reservoir • Reservoir lid with 3m Float switch cable • Submersible reservoir • Wall mounted bracket • Fixing kit • Install manual

Download manual at aspenspumps.com

View install video at aspenspumps.com



aspenspumps.com

+44 (0)1323 848842

sales@aspenspumps.com

Making life easier for the installer